
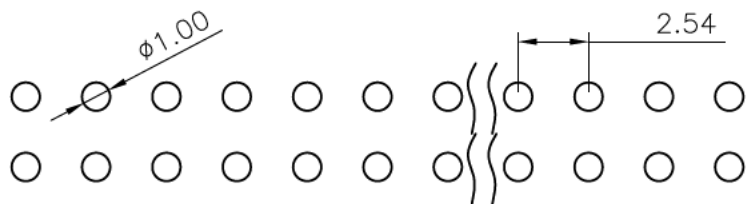



SPECIFICATION

Current Rating : 3AMP
 Insulator Resistance : 1000MΩ Min.
 Contact Resistance : 20mΩ Max.
 Dielectric With Standing : AC 500V
 Operating Temperature : -40°C To +105°C
 Contact Material : Brass
 Insulator Material : PPS UL94V-0
 Standard : Gold or Tin plated

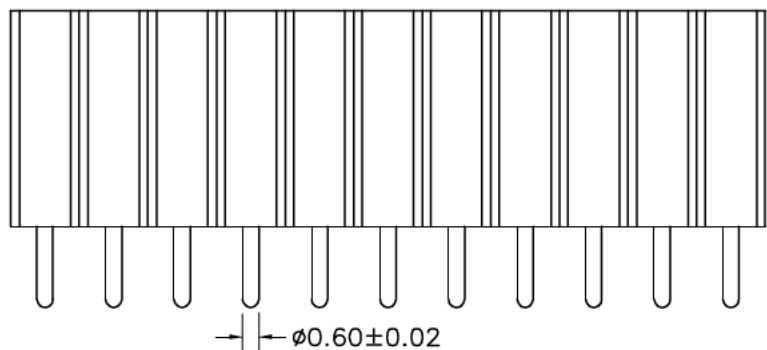

P.C.B LAYOUT

DIMENSIONS ARE IN MILLIMETERS				SCHMID-M	
TOLERANCE					
· ×	±0.5	ANGLE ±3°	SCALE	TITLE Socket Machined Pin Dual Rows, H=8,5mm	
· × ×	±0.1		REV	DRAWING NO SM C07 0109 XX D H=8,5	
· × × ×	±0.05			FILE NO	
DRAWN	Walter	DATE	06.08.18		
APPROVAL	Vanda	DATE			