

HSF RoHS   

SPECIFICATIONS


Rated: 150V,4A
 Dielectric strength: AC1250V/1 Minute
 Insulation Resistance:1000MΩ Min
 Contact Resistance:20mΩ Max
 Temp. range: -40℃~+105℃
 MAX Soldering:+250℃,5s

Housing Material: PA66 (UL94 V-0)
 Contact: Brass, Tin plating


SM C09 0242 XX ROC

XX - No.of pins 2-24P




PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO	OVER	OVER	TO	OVER	OVER	OVER	OVER
6	6	10	30	30	60	100	150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

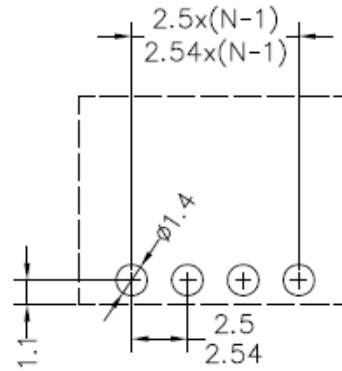



Recommended P.C.B Layout(Top Side)

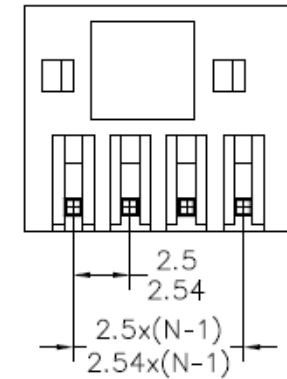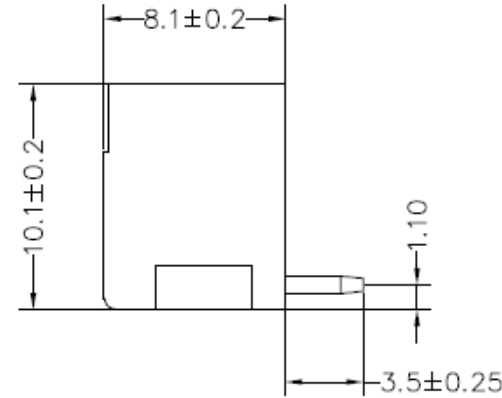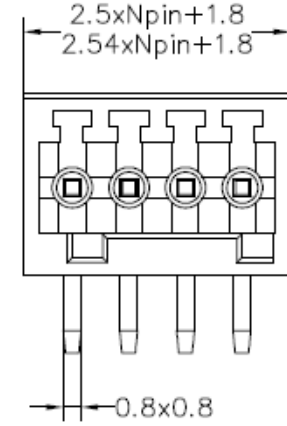

02P



TOLERANCE			
SCALE	UNIT mm		
DRAW Green	DATE 10.10.2021	TITLE	
CHECK Frank	REV	SM C09 0242 XX ROC	
		DESCRIPTION	
		Pluggable Terminal Block RM 2,54mm; Male; Right Angle	