


Material:
 Insulation: PBT/PA, UL 94V-0, Black.
 Connector Pin: Brass, 0.025u" Gold plated
 Nut/Screw: Brass, Nickel plating

Electrical Characteristics:
 Contact Resistance: 5mΩ Max
 Insulation resistance: 100 MΩ Min

Mechanical properties:
 IP rating: IP67
 Wire gauge: 24AWG/0.25mm²
 Mechanical characteristics: mating/cycle > 100 cycle
 Operating Temperature: -40°C ~ +85°C

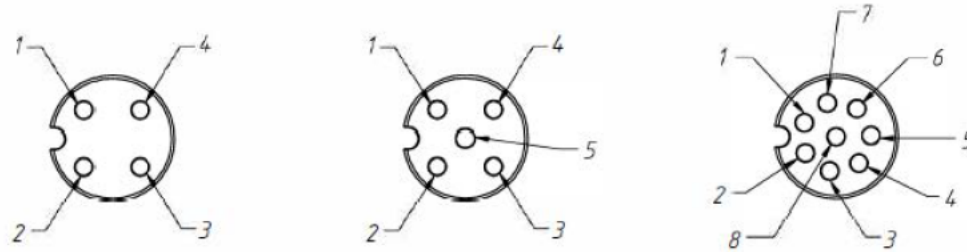


SM C10 NF12-R4SPO-BP7

SM C10 NF12-R5SPO-BP7

SM C10 NF12-R8SPO-BP7

No. of Pin	04 P	05 P	08 P
Rated current	4A	4A	2A
Rated voltage	250V	60V	30V



TOLERANCE			
SCALE	UNIT mm		
DRAW Johnson	DATE 11.11.2023	TITLE	
CHECK Vanda	REV	SM C10 NF12-RXSPO-BP7	
		DESCRIPTION	
		M12 Female Right Angled 4,5 and 8pin	