



SM C10 BF08-R33N0-0.1BPUR

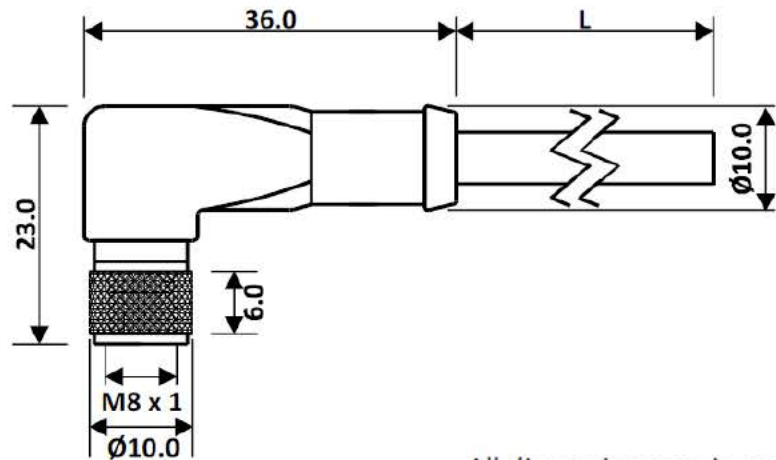

All dimensions are in mm.

Pin Assignment



General Specification

Rated Operational Voltage	60 V
Current Rating	4A
Insulation Resistance	>= 100 MΩ
Temperature Range	-25°C ... +75°C
Degree of Protection	IP67

Material Specification

Grip Material	PU
Contact	Cu-Zn
Contact Plating	Gold Plated
Contact Carrier	Nylon 66
Grip Colour	Black
Coupling Nut	Brass Nickel-Plated

Cable Specification

Cable Length-L	100 mm (10 cm)
Cable Type	3 Core PUR
Sheath Colour	Black
Cross Section of Wire	0.25 sq. mm
Core Dia	1.25 mm
Cable Dia	4.4 ± 0.1 mm
Termination	Partially Stripped

TOLERANCE				
SCALE	UNIT			
DRAW	Braun	DATE	2.1.2019	TITLE SM C10 BF08-R33N0-0.1BPUR
CHECK	Walter	REV		
		DESCRIPTION M08 Female Right Angle		