


ROHS

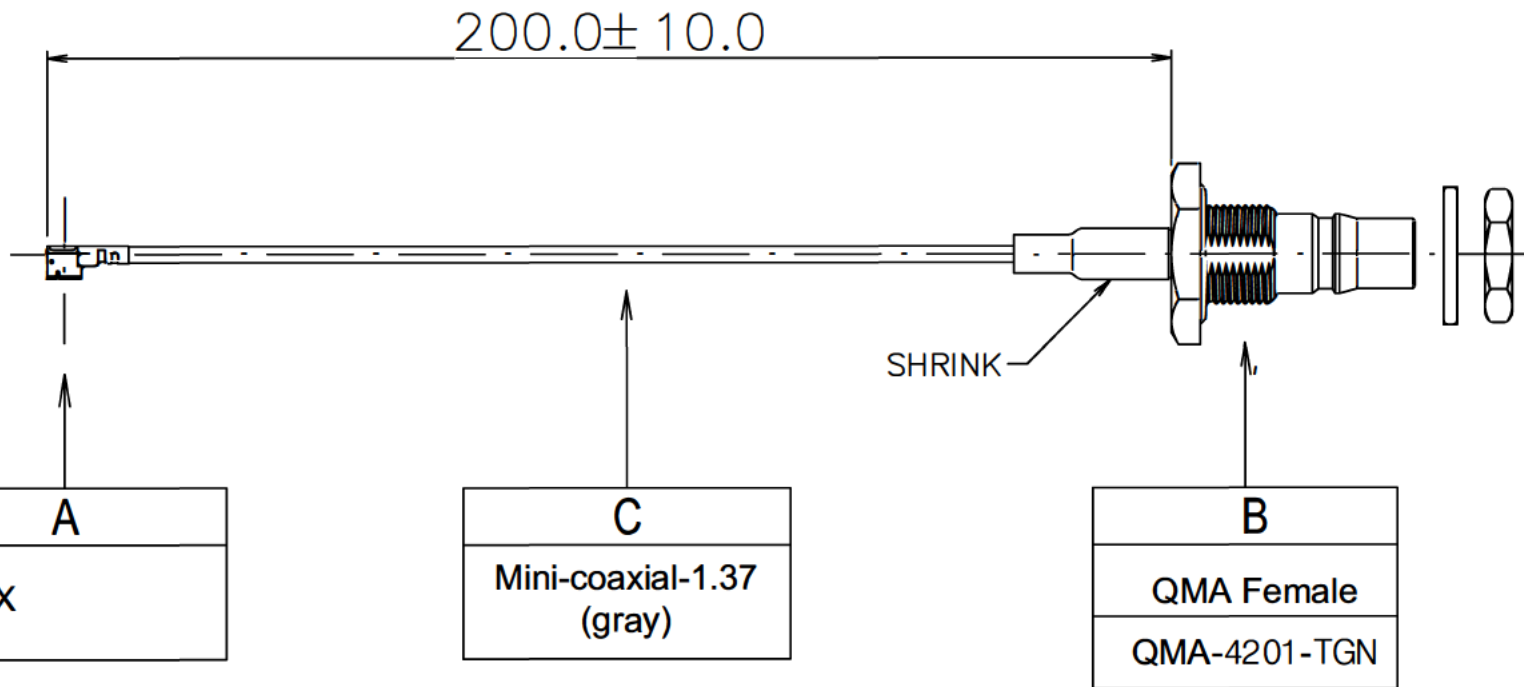

NOTE:

- 1. Impedance : 50Ω
- 2. Frequency Range: DC 0-6 GHz
- 3. VSWR : 1.45 Max
- 4. Operation Temperature -40 °C ~ + 90 °C
- 5. Storage Temperature -40 °C ~ + 80 °C

SCHMID-M				TITLE		UNITS	mm	SCALE	2:1
				PART NO.	SM CAB QMA-4201+IPEX				
APPROVED	GLAZE	DRAWING	DESIGN	DRAWING NO.		△			
		Walter	Vanda	GLAZE		△	2024.01.13	A	
				MATERIAL		SYE	DATE	REV.	