


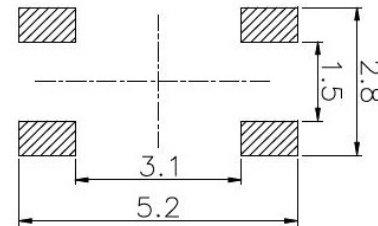


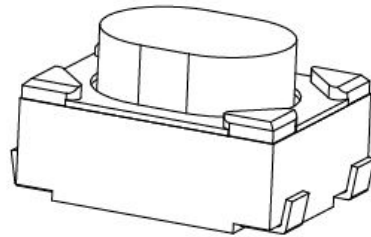

CIRCUIT DIAGRAM

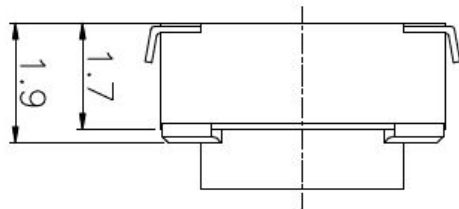

The Main Thchnology Performance

Rate voltage. current	50mA DC12V
Contact resistance	≤100mΩ
Operating force	260±50gf
travel	0.35±0.15mm
Insulated resistance	≥100MΩ
Dielectric strength	≥250VAC/1min
Endurance	≥100000

TOLERANCE		
SCALE	UNIT mm	
DRAW Walter	DATE 20.4.2022	<b>TITLE</b> <b>SM TS A016</b>
CHECK Brise	REV	
		<b>DESCRIPTION</b> SMD Tactile Switch