

# DC-DC Converter SNR - 2.0 Series



## 2A Output Current, Non-Isolated DC-DC Converter



### Features

- 3 Pin SIL, Full SMD Technology
- Non-Isolated Regulator with Very Low Standby Current
- Wide Input Range, Step-down switching DC-DC converter
- High voltage input range, up to 36V
- Continuous Short Circuit Protection
- Pin-out compatible with LM78XX three terminals positive Regulator
- Efficiency up to 96%
- Low ripple and noise

The SNR-2.0 series is a family of cost effective 2.4~30W single output buck DC-DC converters. These converters are encapsulated in a non-conductive black plastic package 3-pin SIL case, continuous short circuit protection with automatic restart, good line/load regulation and ultra low quiescence current. Devices are filled up with flame retardant resin. Input voltages of 3~5.5Vdc and 4.6~36Vdc with output voltage of 1.2, 1.5, 1.8, 2.5, 3.3, 5, 6.5, 9, 12 and 15Vdc. High performance features include high efficiency operation up to 96%.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified.

OUTPUT SPECIFICATIONS	
Voltage Accuracy	±2%, max.
Output Current (Full Load)	2000mA, max.
Line regulation	±0.5%, max.
Load regulation	05 Series For All Vo (From 0% to 100% Load) ±1.0%, max. 24 Series For Vo ≥ 5.0Vdc (From 0% to 100% Load) ±1.0%, max. For Vo ≤ 3.3Vdc (From 0% to 100% Load) ±1.5%, max. For All Vo (From 10% to 100% Load) ±1.0%, max.
Ripple & Noise (20 MHz bandwidth)(1)	For Vo ≤ 6.5Vdc 50mVpk-pk, typ. For Vo ≥ 9.0Vdc 75mVpk-pk, typ.
Short Circuit Protection	Continuous (Automatic Recovery)
Over Load Protection (Hiccup mode)	05 series : 8.5A, typ. 24 series : 3.5A, typ.
Temperature coefficient	±0.02%/°C
Capacitor Load (2)	See table
Transient Recovery Time (3)	150µs, typ.
Transient Response Deviation (3)	±3%, max.

INPUT SPECIFICATIONS	
Input Voltage Range	See table
Start up Time (Nominal Vin and constant resistive load)	5mS, typ.
Input Current (No-Load)	See table, typ.
Input Current (Full-Load)	See table, typ.
Input Filter	Capacitors
Input Reflected Ripple Current (4)	35mA pk-pk, typ.

ENVIRONMENT SPECIFICATIONS	
Operating Temperature	-40°C~100°C(See Derating Curve)
Maximum Case Temperature	105°C
Thermal Impedance (Mounting at FR4 (1.18*1.18 inch) PCB)	34°C/W, min.
Storage Temperature	-55°C~+125°C
Cooling (5)	Nature Convection

### NOTE

1. Ripple/Noise measured with a 0.1µF ceramic capacitor.
2. Tested by nominal Vin and constant resistive load.
3. Tested by normal Vin and 25% load step change ( 75%-50%-25% of Io ).
4. Input reflected ripple current is measured through a source inductor L1(12µH) and a source capacitor C1(10µF) at nominal input and full load.
5. "Nature Convection" is usually about 30-65 LFM but it's not equal to still air (0 LFM).
6. The SNR-2.0 series can meet EN55032 Class B with an external filter in parallel with the input pins.
7. An external filter capacitor and TVS is required if the module has to meet IEC61000-4-4 and IEC61000-4-5.
8. Do NOT operate converters exceeding the absolute maximum rating, over rating will cause damage to converters.
9. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.

GENERAL SPECIFICATIONS	
Efficiency	See table, typ.
Switching Frequency	05 series : 1200 KHz, typ. 24 serie : 410 KHz, typ.
Humidity	95% rel H
Reliability Calculated MTBF (MIL-HDBK-217 F)	05 series : 16 Mhrs, min. 24 serie : 2.6 Mhrs, min.
Safety Standard (design to meet)	IEC/EN 60950-1 IEC/EN 62368-1

PHYSICAL SPECIFICATIONS	
Case Material	Non-conductive Black Plastic(UL94V-0 rated)
Pin Material	0.46x0.46mm Copper Matte tin-coated
Potting Material	Silicon (UL94V-0 rated)
Weight	2.4g
Dimensions	0.55"x0.30"x0.40"




EMC CHARACTERISTICS		
Radiated Emissions (6)	EN55032	CLASS B
Conducted Emissions (6)	EN55032	CLASS B
ESD	IEC61000-4-2	Perf. Criteria A
RS	IEC61000-4-3	Perf. Criteria A
EFT (7)	IEC61000-4-4	Perf. Criteria A
Surge (7)	IEC61000-4-5	Perf. Criteria A
CS	IEC61000-4-6	Perf. Criteria A
PFMF	IEC61000-4-8	Perf. Criteria A

ABSOLUTE MAXIMUM RATINGS(8)	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Surge Voltage (100mS)	05 series : 6Vdc, max. 24 series : 40Vdc, max.
Soldering Temperature (1.5mm from case 10sec max.)	260°C, max.

# SNR-2.0 Series

2.0A Output Current, Non-Isolated DC-DC Converter

## PART NUMBER STRUCTURE

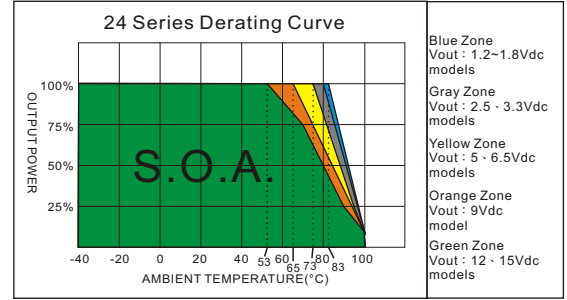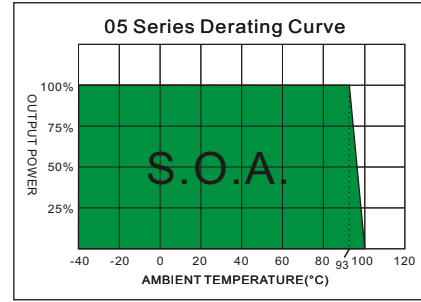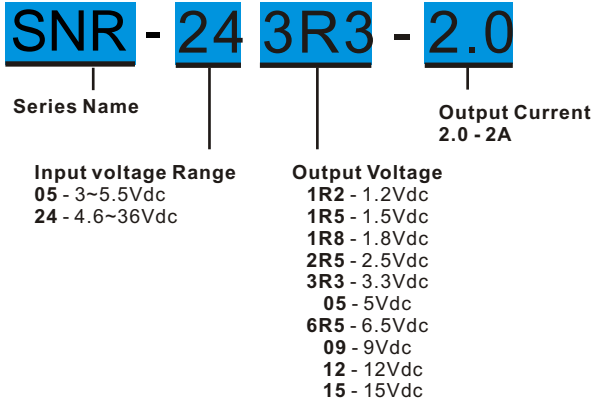


## MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current			OUTPUT Voltage (Vdc)	OUTPUT Current Full Load (mA)	EFFICIENCY		Capacitor Load @FL (μF, max.)
		No-Load (mA, typ.)	Full Load (mA, typ.)				Full Load (% , typ.)		
			@Min. Vin	@Max. Vin			@Min. Vin	@Max. Vin	
SNR-051R2-2.0	5 (3-5.5)	0.5	889	507	1.2	2000	90	86	4200
SNR-051R5-2.0	5 (3-5.5)	0.5	1099	620	1.5	2000	91	88	3700
SNR-051R8-2.0	5 (3-5.5)	0.5	1304	727	1.8	2000	92	90	3300
SNR-052R5-2.0	5 (3.8-5.5)	0.5	1385	988	2.5	2000	95	92	1800
SNR-241R2-2.0	24 (4.6-36)	1.0	621	89	1.2	2000	84	75	2500
SNR-241R5-2.0	24 (4.6-36)	1.0	758	108	1.5	2000	86	77	2000
SNR-241R8-2.0	24 (4.6-36)	1.0	900	127	1.8	2000	87	79	1600
SNR-242R5-2.0	24 (4.6-36)	1.0	1221	167	2.5	2000	89	83	1200
SNR-243R3-2.0	24 (4.75-36)	1.0	1527	213	3.3	2000	91	86	900
SNR-2405-2.0	24 (6.5-36)	1.0	1637	312	5	2000	94	89	600
SNR-246R5-2.0	24 (9-36)	1.0	1537	397	6.5	2000	94	91	470
SNR-2409-2.0	24 (12-36)	1.0	1579	544	9	2000	95	92	330
SNR-2412-2.0	24 (15-36)	1.0	1684	717	12	2000	95	93	270
SNR-2415-2.0	24 (18-36)	1.0	1736	887	15	2000	96	94	200

## TEST CONFIGURATIONS


### Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor  $L_{in}$  (12μH) and a source capacitor  $C_{in}$  (10μF, ESR<1.0Ω at 100kHz) at nominal input and full load.

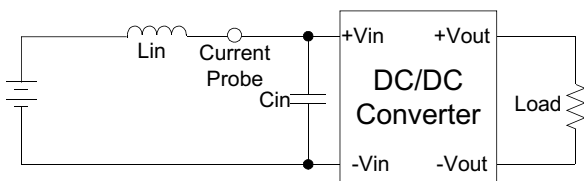

### Output Ripple & Noise Measurement Test



Measure with a 0.1μF ceramic capacitor. The Scope measurement bandwidth is 0-20MHz.

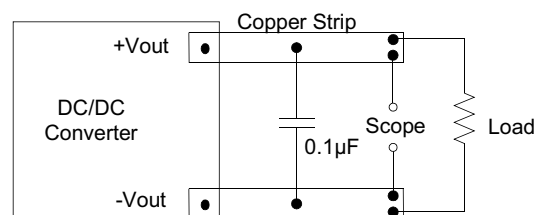

EMC COUNTERMEASURES


EMI Countermeasures

Input filter components (C1, C2, C3, L1) are used to help meet EMI requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

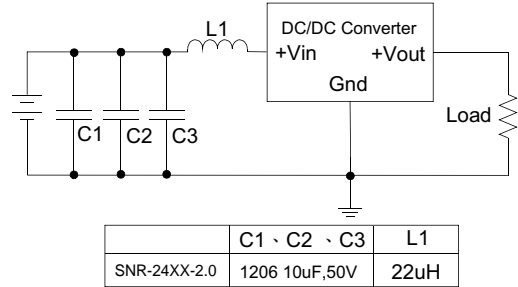
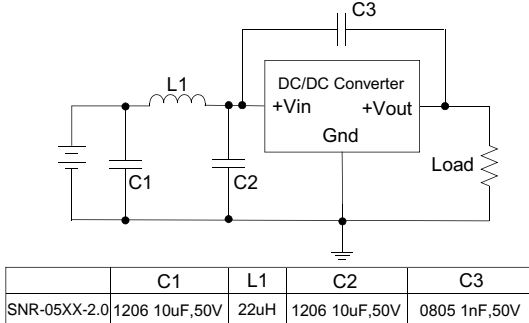


EFT & Surge Test Countermeasures

The filter SCHMID-M suggest: 05 Vin models : Nippon - chemi - con KY series , 3300uF/10V and a TVS , 3KW , 6.0V  
 24 Vin models : Nippon - chemi - con KY series , 220uF/100V and a TVS , 3KW , 36V

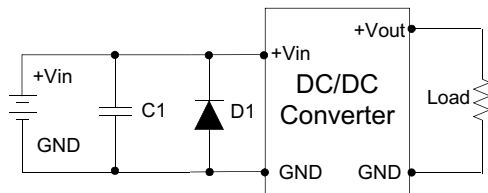

MECHANICAL SPECIFICATIONS

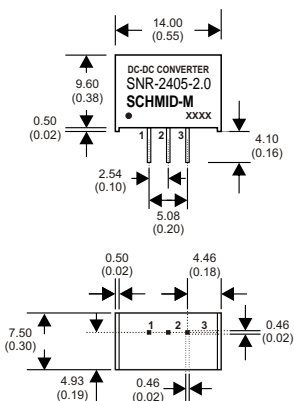

- Notes : All dimensions are typical in millimeters ( inches ).
1. Pin diameter: 0.65±0.15 ( 0.03±0.006 )
  2. Pin pitch and length tolerance: ±0.35 ( ±0.014 )
  3. Pin to case tolerance: ±0.5 ( ±0.02 )
  4. Case Tolerance: ±0.5 ( ±0.02 )

PIN CONNECTIONS	
PIN NUMBER	SINGLE
1	+V Input
2	GND
3	+V Output

**SCHMID MULTITECH GMBH**

TEL: +49-9403-9510-0 FAX: +49-9403-9510-22  
 Weinbergstraße 60b, 93105 Tegernheim, Germany  
 www.schmid-m.com info@schmid-m.com